

Product Description

MetecnoSpan[®] is a roofing system that combines the roofing, insulation and ceiling in one roof panel with a fire-retardant polyisocyanurate (PIR) core. MetecnoSpan[®] is FM Approved (4880, 4881 & 4471) and is recommended where FM Approved products is required. MetecnoSpan[®] is capable of long spans and high thermal performance and is used mainly in commercial and industrial roofing applications.

Panel Properties

Panel Thickness (mm)	40	60	80	100
Typical Mass (kg/m ²)	10.7	11.6	12.7	13.2
Total R-value (m ² K/W)	2.3	3.4	4.4	5.5

Note: The above Total R-values are for insulation average temperature of 15°C. Contact us for other temperatures.

Span Table

NON-CYCLONIC REGION A&B (ROOF APPLICATIONS ONLY)

PIR Core / 0.42mm Hi-tensile External / 0.5mm Internal Steel Skins.


Maximum uniformly distributed ultimate wind load (kPa) for the given span:

Single Span, wind pressure acting outwards

Span (mm)	Panel Thickness (mm)			
	40	60	80	100
1500	4.99	6.94	8.56	9.83
2700	2.15	2.84	3.57	4.31
3900	1.08	1.41	1.76	2.12
5100	0.67	0.86	1.07	1.29
6300	-	-	0.74	0.88

Multi-span, wind pressure acting outwards

Span (mm)	Panel Thickness (mm)			
	40	60	80	100
1500	4.01	5.57	6.87	7.31
2700	2.27	3.14	3.86	4.11
3900	1.48	2.20	2.70	2.88
5100	-	1.40	1.83	2.20
6300	-	-	1.23	1.48

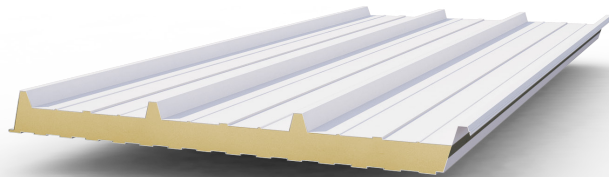

Core	PIR (Fire-retardant Polyisocyanurate)
Width (cover mm)	1000
Thickness (mm)	40, 60, 80, 100
Length	Up to 25m (check for availability)
External Material	0.42mm G550 Zinalume™ or Colorbond® steel
External Finishes	Trapezoidal Profile
Exterior Colour Options	Surfmist® and Zinalume™. Other colours available subject to minimum order quantities.
Internal Material	0.5mm G300 Colorbond® steel
Internal Finishes	Plain, Fineline, Satinline, V Rib
Interior Colour Options	Surfmist®
Pitch	2 degree minimum
Paint System	AS/NZS 2728 & AS 1397
Accreditations	CodeMark Certificate Number CM40183
Acoustic Properties	Rw 24 - 25 depending on thickness
Material Group Numbers	C1.10 Group 2
Bushfire Attack Level	BAL-40
FM Approval	4471, 4880, 4881
Environmental	Zero Ozone Depleting Potential (ODP)
Fire hazard properties	AS/NZS 1530.3
Ignitability Index	0
Spread of Flame Index	0
Heat Evolved Index	0
Smoke Index	1

AS/ISO 9705 - BCA Group Number (Spec C1.10)


MetecnoSpan[®] PIR steel skinned insulated building panels conform to the requirements of the BCA Specification C1.10 as Group 2.

Group 2: Panel up to 200mm thick with aluminium 'wall-wall' and 'wall-ceiling' angles (1.5mm) fixed with aluminium rivets or screws is classified as Group 2. Panel up to 200mm with steel 'wall-wall' and 'wall-ceiling' angles (0.5mm) fixed with steel rivets or screws is classified as Group 2.


NOTES:

- Extended span tables including cyclonic regions C&D and wind pressure acting inwards are also available. Refer Bondor[®].
- Fixing with min. 14g tek screws (or equivalent) at each rib are required.
- Pressures specified are for wind gusts only per AS/NZS 1170.2.
- Deflection limit of span/150 applies, and in accordance with Serviceability Limit State criteria per AS/NZS 1170.0 - TABLE C1.
- Self weight of the panel has been allowed for, plus an allowance of up to 10kg/m² for light duty fittings (lights, etc.). No other dead loads permitted.
- Non-trafficable maintenance access (concentrated load) of 140kg (exceeding min. requirements of AS/NZS 1170.1) on any one panel has been allowed for.
- Distributed live load of 0.25kPa (as per AS/NZS 1170.1) has been allowed for. Bondor[®] tests comply with details outlined in AS 4040.0, AS 4040.1, AS 4040.2, AS 4040.3, AS 1562.1 and AS/NZS 1170.1.
- Min. roof slope of 2 degree applies.
- For FM Approved applications,
 - a) a max. span of 1830mm applies.
 - b) approved fasteners must be used. Refer Bondor[®].


Joint

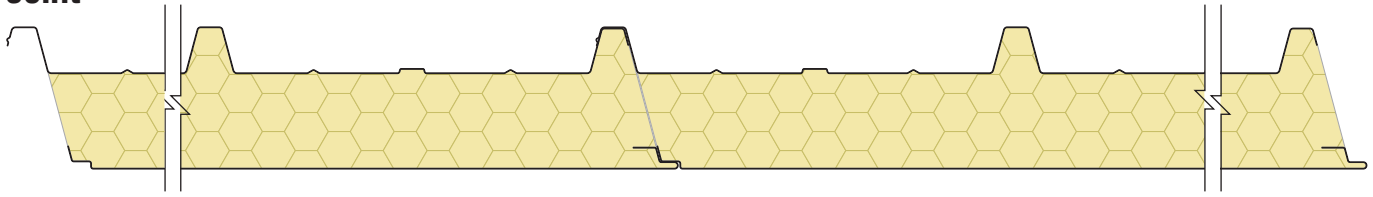

Profiles

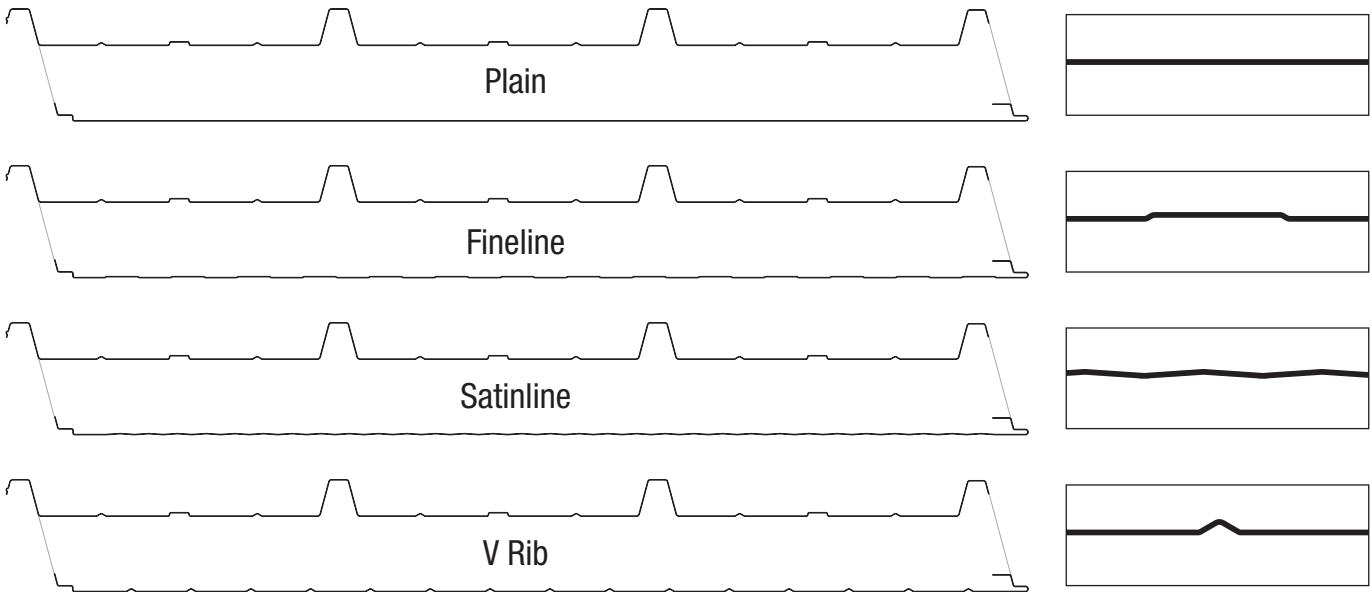

Dimensions

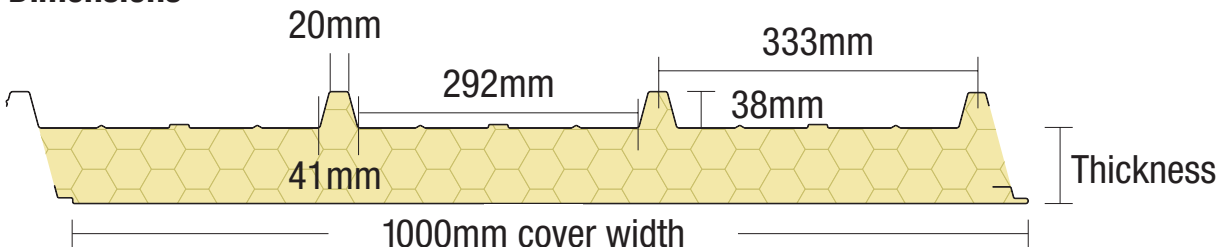

Bondor[®] National Network

BRISBANE / EXPORT
103 Ingram Road
Acacia Ridge QLD 4110
T: 07 3323 8500
F: 07 3323 8501

PERTH
17 Gauge Circuit
Canning Vale WA 6155
T: 08 9256 0600
F: 08 9256 0620

MELBOURNE
329A St Albans Road
Sunshine VIC 3020
T: 03 8326 8000
F: 03 8326 8099

ADELAIDE
70 – 72 Rundle Road
Salisbury South SA 5106
T: 08 8282 5000
F: 08 8282 5099

SYDNEY
49 – 53 Newton Road
Wetherill Park NSW 2164
T: 02 9609 0888
F: 02 9729 1114

LAUNCESTON
7 Connector Park Drive
Kings Meadows TAS 7249
T: 03 6335 8500
F: 03 6335 8544

To connect to your nearest Bondor[®] branch simply call 1300 300 099 or visit www.bondor.com.au